

Quadro[®]2xi

THE GLOBAL PHONE NETWORK IN A BOX



Quadro2xi: The IP PBX with 1 ISDN Port, 2 FXS Ports and 2 IP Phones

The Quadro2xi is an as fully-featured IP PBX for home offices and teleworkers as the Quadro2x is. The important difference: Quadro2xi offers you an ISDN line instead of FXO and connects you via two B-channels of 64 kbit/s each to the digital PSTN. A 10Base-T Ethernet line provides access to the Internet.

Alltogether, two standard phones and two fully-featured LAN IP phones (SIP/MGCP) may be attached. Additional virtual extensions allow e.g., registering at various SIP servers. In addition, all extensions assigned to a line may be mirrored and act as remote IP extensions. Wherever you are, calls will reach you, and you will be able to make calls as if you were at your home office.

Fully-Featured IP PBX

The Quadro2xi offers the same multitude of features as the Quadro2x: extensive PBX functionality, integrated voicemail, cost saving call routing functionality, IP routing, SIP call signaling and much more.


Integrated Internet Access Router

The Quadro2xi IP PBX embodies a fully-fledged Internet access router with firewall

security, including NAT, policy and service based filtering. An extensive IPSec VPN functionality with DES, 3DES and AES encryption makes an additional contribution to data security.

VoIP Carriers

The Quadro2xi IP PBX is easily applicable for VoIP Carriers as well as small businesses. For VoIP carriers, a special wizard has been implemented that facilitates the configuration of Quadro2xi to work according to individual requirements.

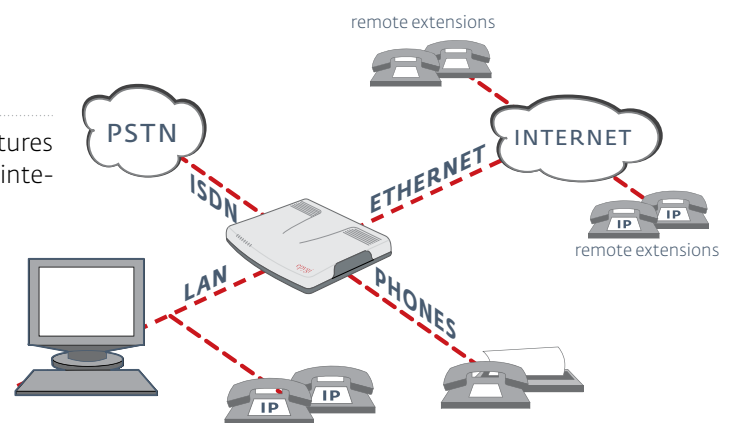

Telephony

Voice Features

Voice Coding G.711, G.723 (5.3, 6.3 kbit/s), G.726 (16, 24, 32, 40 kbps),
G.729, iLBC (13.33 kbit/s, 15.2 kbit/s);
(RFC 3951, ITU-T: G.711, G.723, Annex A, G.726, G.729 Annex A; IETF;
ITU-T Q.23, Q.24, Bellcore GR.506, GR.181; ITU-T
G.168-2000, 2002; ETS_300659_1,2,3)
NAT traversal (both manually and STUN)
VAD, CNG, G.168 echo cancellation

Bandwidth Requirements

Per call WAN bandwidth requirements for the following codecs (non-encrypted/VPN encrypted):

G.711/G.711u	20 msec	84 kbps/105 kbps
G.726-16	20 msec	37 kbps/59 kbps
G.726-24	20 msec	45 kbps/65 kbps
G.726-32	20 msec	52 kbps/74 kbps
G.726-40	20 msec	60 kbps/80 kbps
G.729a	20 msec	29 kbps/49 kbps
G.723	30 msec	21 kbps/34 kbps
iLBC	30 msec	27 kbps/41 kbps

PBX Features

Call block, forward, hold, ID, park, relay, transfer, wait
Voice mail
Multilevel auto attendant with Interactive Voice Response (IVR)
Distinctive ring, hold music, speed dialing
Many extensions ring
Call statistics
Do not disturb service
Unified messaging
3-way conferencing
Hotline service
T.38 fax, fax relay and clear channel fax
Unified Fax Messaging
Busy auto redial
Multiple user extensions (up to 32 physical/virtual/remote extensions)

Call Signaling

SIP on the WAN and LAN side (RFCs: 3261, 3263, 3265, 3311, 3428, 3515, 3842, 3856, 3891, 3892, 3581, draft-ietf-sip-session-timer-15, draft-ietf-sipping-dialog-package-05;
Presence: RFCs: 3842, 3856, 3863, draft-ietf-sipping-dialog-package-05)
SDP (RFC 2327)
RTP (RFCs: 1889, 1890, 2833, 3389, 3550, 3551, 3555, draft-ietf-avt-rfc2833bis-05, draft-ietf-avt-rtp-ilbc-05) in band and out of band signaling support
RTP Proxy
MGCP with support of the full MGCP business extensions and full screen and soft buttons control of the MGCP phones on the LAN side
(RFCs: 3149, 3435, 3660, draft-foster-mgcp-returncodes-01,
PKT-SP-EC-MGCP-10-040402)
Fax over IP (ITU-T: T.4, T.30, T.38, V.17, V.21, V.27 ter, V.29)

POTS Signaling

Loop start
FSK and DTMF Caller ID support

ISDN Signaling

ITU-T: Q.921, Q.931, Q.951; ETSI ETS300 102;
NTT INS64 for Japan

Connectivity

Extensions

Total 70 extensions including FXS phones (2), LAN IP phones (2), remote extensions (4) and virtual extensions
The virtual extensions allow e.g., registering on several SIP servers
4 remote extensions for any FXS extension and any LAN IP phone

LAN IP Phones

2 SIP/MGCP phones
Remote IP extensions may be enabled for both SIP/MGCP phones

System Capacity

8 simultaneous VoIP calls with external parties
Unlimited station to station calling for IP phones
Unlimited station to station calling for analog phones
2 simultaneous ISDN calls with external parties
2 simultaneous calls through a VPN

Premise Connections

2 short-loop FXS ports (RJ11)
1 Ethernet 10/100BASE-T port (RJ45)

Uplink Connection

1 ISDN port to the Central Office (RJ45)
1 Ethernet 10BASE-T (RJ45)
(Other Quadro IP PBX models offer also FXO, ADSL or G.SDSL uplink connectivity. Please refer to the corresponding Technical Data Sheets.)

Billing

Radius Client (RFCs: 2865, 2866)

Internet

NAT address translation
STUN/NAT traversal (RFC 3489)
IPSec VPN with DES, 3DES and AES encryption in tunnel mode (RFCs: 2402, 2406, 2409)
PPTP/VPN
L2TP/VPN
Manual and automatic IKE key support
Firewall security via:
NAT (Network Address Translation)
Policy and service-based filtering
DHCP server on the LAN side
DHCP client on the WAN side
DNS server with forwarding functionality
SNTP (Simple Network Time Protocol) server/client for computer clock synchronization
PPPoE connection to the ISP with PAP/(MS)CHAP authentication
IP DIFFSERV for QoS
Mail client to send voice messages as e-mail attachments (.wav) and system notifications
DNS (DYNDNS) support with third party
Port forwarding
Port translation

System

Management

Multilingual WEB interface accessible from LAN and WAN (HTTP/HTTPS), the WAN management access can be switched off
Password control
Remote diagnostics and software upgrade
VoIP Carriers wizard
Download/restore configuration
Legible and editable configuration files
Auto-configuration via TFTP
Reset button with factory reset option

Diagnostics/Testing

LEDs: Busy, Info, Fault, LAN, WAN, Line 1, Line 2
IP Call Quality Rating
Remote testing and VoIP diagnostics
Power-up diagnostics
Loop-back testing

Environmental

Physical Dimensions

Desktop devices, wall-mountable:
Measurements: 741" x 6.24" x 1.77"
(19 x 16 x 4.5 cm)
Weight: 13 ounces (360 g)

Conditions

41°F - 104°F (5°C - 40°C) operating temperature
41°F - 140°F (5°C - 60°C) storage temperature
5% - 90% non-condensing humidity

Power Supply

Input 100 - 240 VAC; 50/60 Hz; 0.5 A
Output 12.0 VDC; 1.5 A

Regulatory Compliance

Safety: EN 60950;
EMC: FCC Part 15 Class B;
EN55022 Class B, EN55024; EN 60950;
Telecom: TBR3 (ISDN);

ALLOY Epygi Distributor for
.Australia .New Zealand .U.S.A.

	Australia & NZ	U.S.A - AlloyCP
Phone	+61 3 8562 9000	+1 408 873 7350
Toll Free	1800 817 807	888 895 8256
Email	sales@alloy.com.au	sales@alloycp.com
Web	www.alloy.com.au www	.alloycp.com

